
GC20618-Z series

直驱一体式综合送料厚料平缝机 系列

Direct drive heavy duty compound feed lockstitch sewing machine

iHighlead 爱海菱



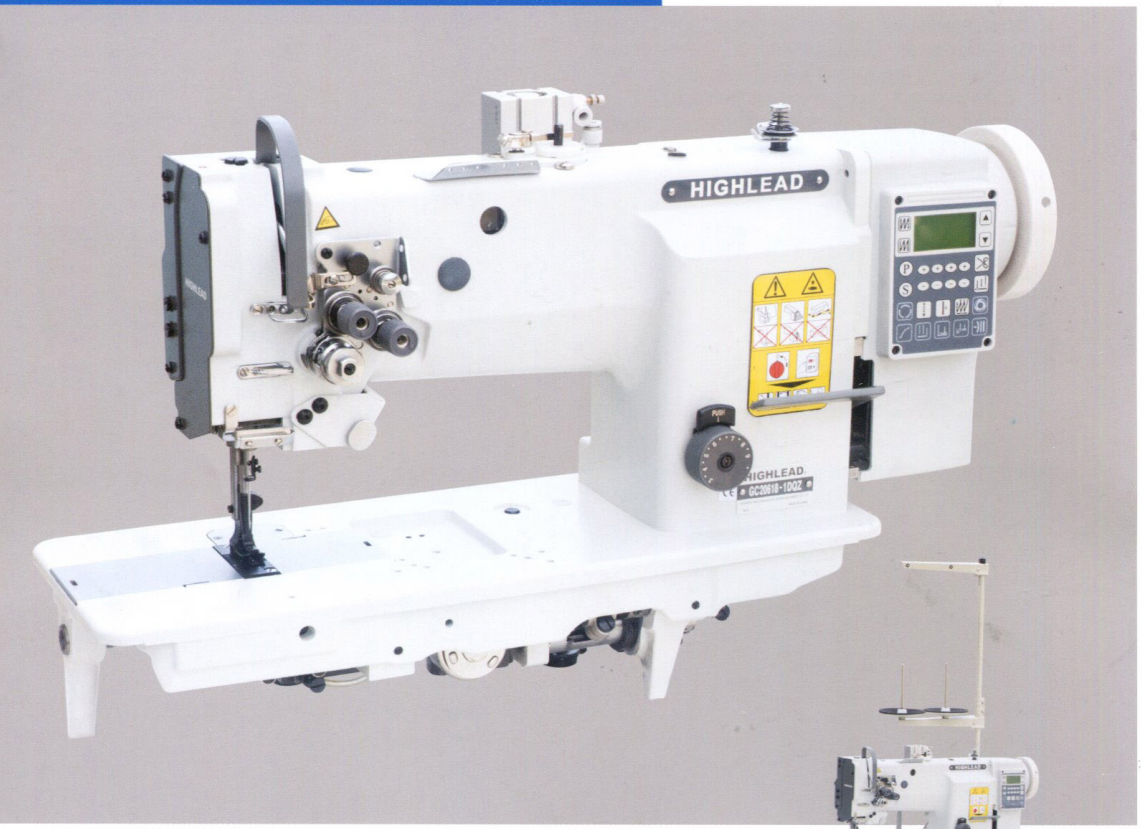

GC20618-1DQZ 直驱一体式单针自动剪线综合送料厚料平缝

301 DIGITAL

缝速: 2000转/分
直驱一体式综合送料 大旋梭 自动润滑
气动操控 分单针 双针 自动剪线机型
适用于汽车座椅 汽车内饰件 帐篷 沙发等

海菱 HIGHLEAD

HIGHLEAD

GC20618-Z 系列直驱一体式综合送料厚料平缝机

本机型采用小型大功率伺服电机直接驱动，伺服控制系统与机头一体式设计。分为单针、双针普通型和自动剪线四种机型。采用大型立式旋梭勾线，滑杆挑线，同步齿形带传动，柱塞式油泵润滑系统。由于采用针杆摆动与压脚送布牙同步送料方式，使整机在综合性能上传动轻滑，噪声小，耐用度高。设有保护旋梭超负荷的离合装置，确保了缝制品和旋梭的安全。压脚提升和倒缝采用气动控制，极大地减轻了操作者的劳动强度。特别适合于汽车座椅、安全带、安全气囊、汽车内饰件、沙发、箱包、帐篷等厚料物品的缝制。


GC20618-1Z 直驱一体式单针综合送料厚料平缝机
GC20618-1DQZ 直驱一体式单针自动剪线综合送料厚料平缝机
GC20618-2Z 直驱一体式双针综合送料厚料平缝机
GC20618-2DQZ 直驱一体式双针自动剪线综合送料厚料平缝机

This series is designed with powerful built-in mini servo motor for direct drive, motor integrated with head, vertical rotating hook for thread loop catching and sliding bar fro thread up-taking. It has been sub-classed into single needle and double needles, with trimmer and without trimmer. The application of compound feed provides this series with such splendid features as smooth running, quiet working and a long service life. It is also equipped with a safety clutch to prevent the hooks from damage by over-duty operation. Presser foot lifter and back tacking controlled by pneumatic decrease the working strength, it is especially available in stitching car seat, safety belts, safety air bags, sofa, bags, tents etc.

GC20618-1Z Direct drive single needle compound feed heavy duty lockstitch sewing machine
GC20618-1DQZ Direct drive single needle compound feed heavy duty lockstitch sewing machine with automatic thread trimmer
GC20618-2Z Direct drive double needles compound feed heavy duty lockstitch sewing machine
GC20618-2DQZ Direct drive double needles compound feed heavy duty lockstitch sewing machine with automatic thread trimmer





型 号 Model	GC20618-1Z	GC20618-1DQZ	GC20618-2Z	GC20618-2DQZ
最高缝速 Max.sewing speed	2000 r.p.m			
线迹长度 Stitch length	0-9 mm			
压脚提升 Presser foot lift	手动 By hand 8mm 气动 Pneumatic 16mm			
机 针 Needle size	DP×17 18#-23#			
针杆行程 Needle bar stroke	36 mm			
压脚交互量 Presser foot alternation	2-6 mm			
旋 梭 Rotating hook	立式2倍大旋梭 Large vertical hook (2 times)			
润滑方式 Lubrication	自动润滑 Auto lubricated			
自动剪线 Auto trimmer	○	★	○	★
自动抬压脚 Auto foot lifting	★	★	★	★
电动机 Motor	220伏850W伺服电机 220V 850W servo motor			
针间距 Needle gauge	GC20618-2Z GC20618-2DQZ 标准 Standard 6.4mm 特殊 Special 3.2 4.8 9.5 12.7mm			

特殊规格针间距请在订货时指定
Please specify for special needle gauge when ordering

产品请以实物为准，本图片仅供参考，制造商保留因技术改进而更改规格的权力，恕不另行通知。

上海标准海菱缝制机械有限公司
SHANGHAI BIAOZHUN HAILING SEWING MACHINERY CO., LTD.

上海市松江区书林路850号 Add: No.850 Shulin Road, Songjiang District, Shanghai, P.R.China 201612
国内销售 Domestic Business: 电话Tel: (021) 64061284 传真Fax: (021) 64462799
零件销售 Parts Sales: 电话Tel: (021) 64851424 传真Fax: (021) 64069792
国际贸易 Overseas Business: 电话Tel: (021) 64853303 传真Fax: (021) 64854304
上海市虹梅路2007号远中产业园5号楼105室
Add: RM105, Bld.5 Yuan Zhong Industry Park, No.2007 Hongmei Road, Shanghai, P.R.China 201103
E-mail: sales@highlead.com.cn http://www.highlead.com.cn

销 售 商:

2018.7